

## 1962 & 63 Galaxie notchback / 1960-62 Galaxie convert. door seal installation



### HELPFUL TIPS


#### BEFORE APPLYING WEATHER STRIPPING

Experience has shown us that screwing or taping the door seal into position before any adhesive is applied allows you to check the fit of the seal and to make any door adjustments if necessary.

Apply the adhesive to the door, not the seal. Glue around the door as described in the instructions.

The best (and cleanest) results comes from glueing a 12" to 18" section of the door at a time, applying the weather stripping then taping it into position before continuing onto the next 12" to 18" section.

After the adhesive has had ample time to cure the tape can be removed.

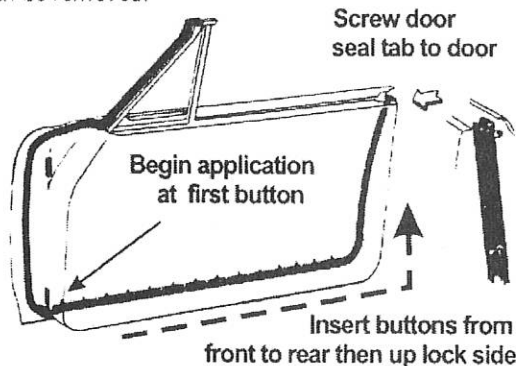

#### DO NOT APPLY ADHESIVE UNTIL STEP 5

##### STEP 1

Remove the old door seals and glue material from the doors. Clean doors thoroughly where the seals are to be adhered. A degreaser/ wax remover solution is recommended.

##### STEP 2

Determine the left and right door seals.

##### STEP 3

Start weather stripping application by beginning at the bottom front of the door. Insert the first button into the hole on the door then install the remainder of the buttons moving to the rear of the door then up the lock side. Attach the screw tab of the seal to the top of the door.

##### STEP 4

Again starting at the lower front of the door, drape the seal up the front of the door (hinge side) then screw the rubber to the vent window frame through the hole located at the top.

##### STEP 5

The door seal is now in position to apply adhesive. Apply adhesive to lock side, hinge side, and vent window area.

# C L A S S I C F O R D

## Mercury

### WINDSHIELD SEALS

TOP QUALITY RUBBER  
Made In The U.S.A.

### WEATHER STRIPPING


for Cars & Pickups

#### DOOR SEALS

#### TRUNK SEALS

#### VENT WINDOW SEALS

#### WINDOW CHANNELS KITS

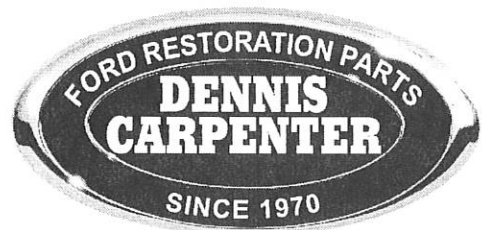

4140 Concord Parkway So., Concord, NC 28027  
(704) 786-8139 email: info@dennis-carpenter.com

[www.dennis-carpenter.com](http://www.dennis-carpenter.com)