
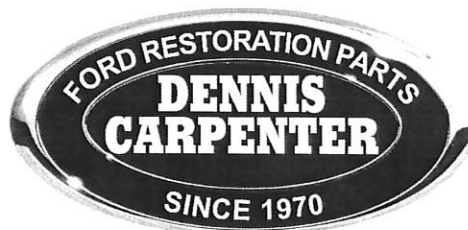


## C6TZ-9720708-PR 1966-77 Ford Bronco Door Seal Installation

NOTE: It is necessary to use a weather stripping adhesive in order to install door seals. Dennis Carpenter Ford Restoration Parts recommends 3M Weather Stripping Adhesive. Our part # is COAZ-19554-A for the adhesive

### INSTALL DOOR SEALS

1. Remove the old door seals and glue residue from the door opening. Thoroughly clean the metal where the seals will be glued. Use a degreaser / wax remover solvent for best results.
2. Begin by installing the rear "molded end" of the door seal to the upper door opening with a screw.
3. Apply adhesive into the groove of the door seal. Run a bead to the first push pin (the section of the seal with the push pins does not require adhesive but it can be applied if desired). Install the seal onto the pinch weld. A small slit may need to be cut into the lip of the seal where the pinch weld meets the seat
4. Snap the push pins of the door seal into the holes along the bottom of the door opening.
5. Once all of the push pins are in apply adhesive into the remainder of the groove of the seal and install the seal onto the pinch weld up to the top of the door opening.
6. Secure molded end of the seal with screw.
7. Allow the adhesive to dry for at least one hour before closing the door.

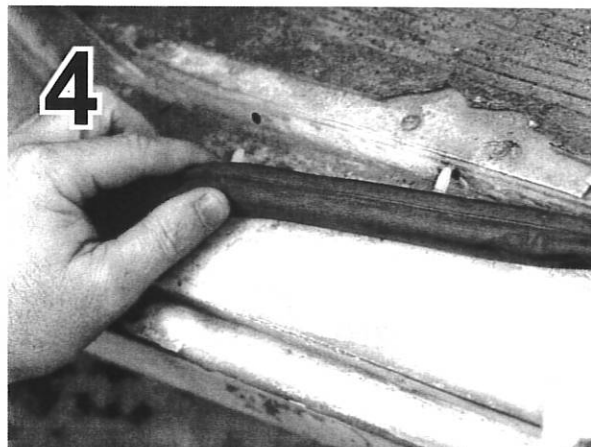

4140 Concord Parkway So., Concord, NC 28027  
(704) 786-8139 email: [info@dennis-carpenter.com](mailto:info@dennis-carpenter.com)  
[www.dennis-carpenter.com](http://www.dennis-carpenter.com)